


GATE HINGES ON THE RIGHT
FROM INSIDE LOOKING OUT.



A	DRIVEWAY WIDTH	
B	LONG SIDE OF LOOP WIDTH (A - 4')	
NOTE: CENTERED ON DRIVEWAY		
C	SHORT SIDE OF LOOP WIDTH	
NOTE: COMM. VEHICLE = 6'; PASS. VEHICLE = 4'		
D	GATE TO LOOP DISTANCE = C	
E	MIN. SPACING 4" FROM GATE PATH	
F	OPER. ARM PIVOT TO GATE PIVOT	
G	OPER. ARM PIVOT TO GATE PIVOT	
H	KEYPAD MINIMUM DISTANCE 6'-0"	
J	HINGE PIVOT TO OPER. ARM PIVOT	
K	PHOTOEYE DISTANCE FROM GATE PATH - 3" MAXIMUM	
L	INSIDE TO INSIDE GATE POSTS	

OPERATOR MFR.	MODEL
LINEAR	VS-GSWG
	SWG
	SWR
	SWC
HYSECURITY	SWINGSMART CNX20
	SWINGSMART DC20
	CSW24UL
LIFTMASTER	RSW12UL
	CSW200UL

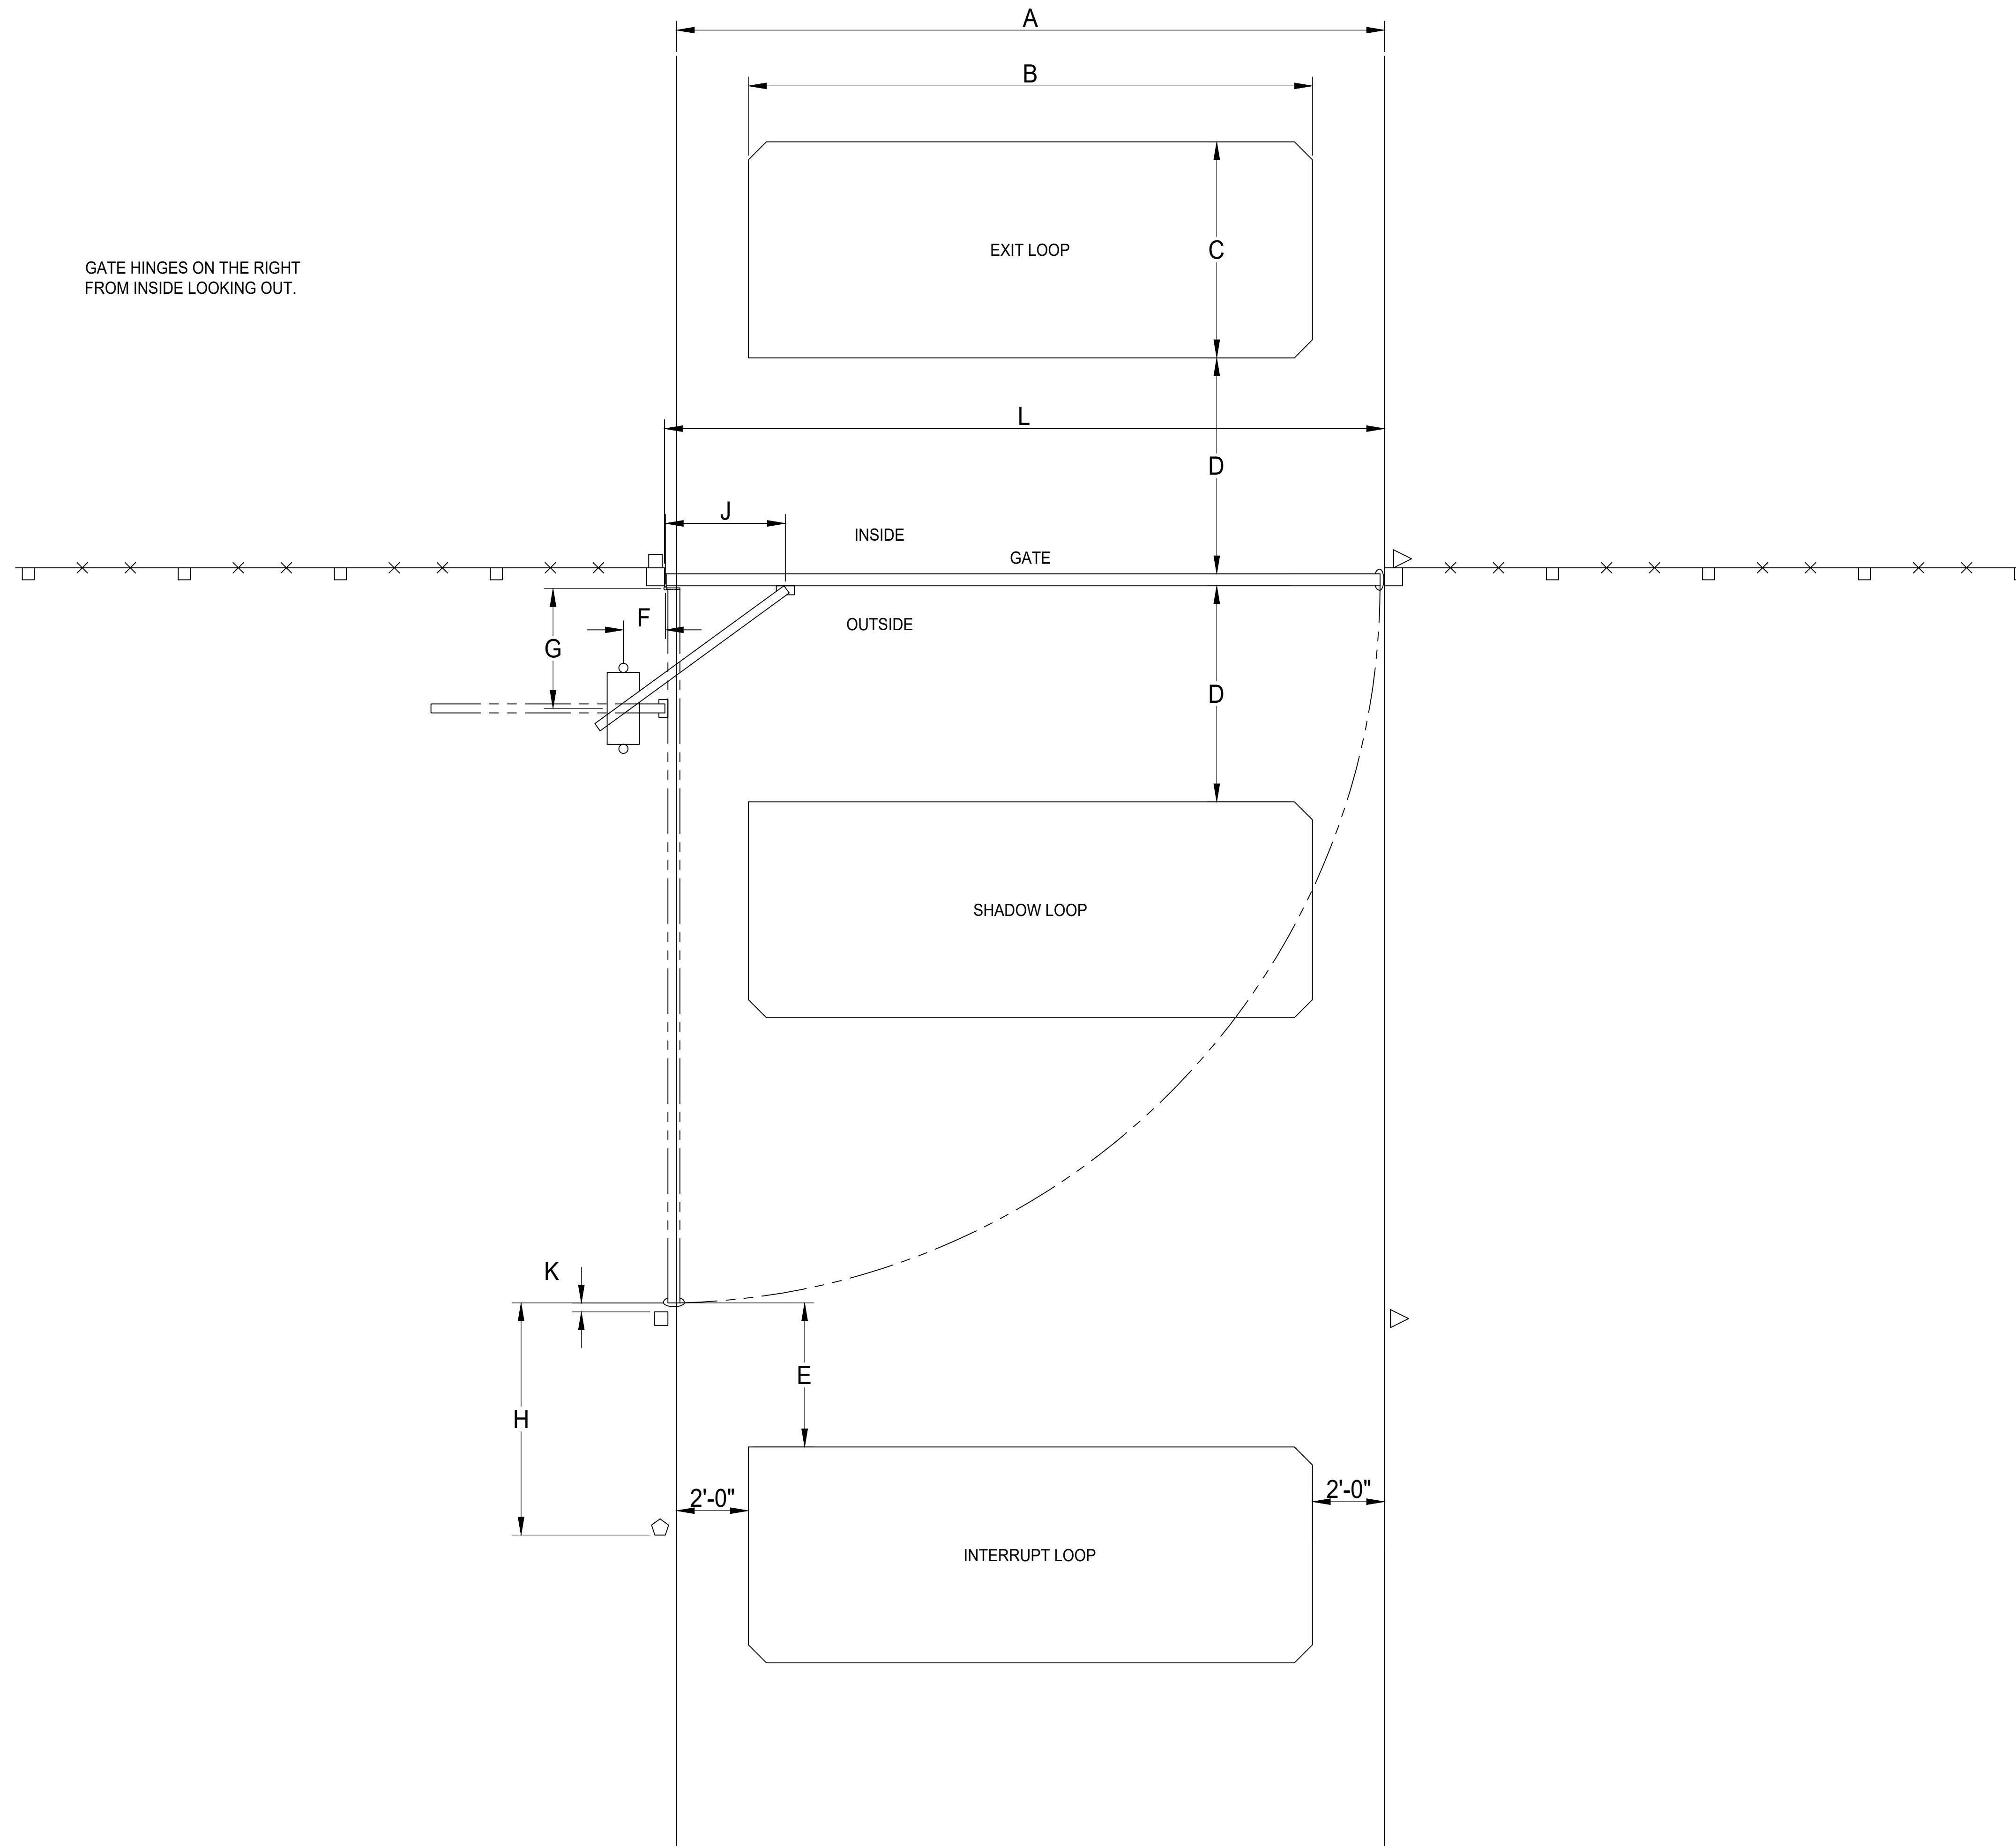

**SINGLE SWING GATE (RIGHT)
EQUIPMENT LAYOUT DRAWING
LIFTMASTER, LINEAR AND HYSECURITY
OUTSIDE SWINGING GATE**